

GROUND SOURCE HEAT PUMP NIBE™ F1145

New improved generation

NEW
Improved
generation



Features of NIBE™ F1145

Extraordinarily high efficiency (COP)

Extremely installer-friendly

Modular system for service friendliness

Multicolour display with user instructions and multilingual support

Remote control via GSM (accessories)

Scheduling (indoor comfort and hot water as well as cooling and ventilation)

Universal connection interface (1xUSB-port)

Remarkably low sound level

Low energy DC circulation pumps (A)

Elegant, timeless and international design

New improved generation:

- Higher efficiency
- Speed controlled circulation pumps for optimized heating and hot water charging
- Improved installer friendliness
- Master/slave compatible with up to nine pcs in cascade and in combination with NIBE F1345
- NIBE Uplink compatible

NIBE F1145

NIBE F1145 is one of a new generation of heat pumps, designed to supply your home with cost efficient and environmentally friendly heating. With an integrated immersion heater, circulation pumps and a control system, the heat production is both safe and economical.

The heat pump can be connected to an optional low temperature heat distribution system such as radiators, convectors or underfloor heating. It is also prepared for connection to several different products and accessories, e.g. hot water heater, free cooling, ventilation recovery, pool and other heating systems.



A+++

Energy efficiency class package
label for NIBE F1145-5-15

 **NIBE**

Technical specifications

NIBE™ F1145

Type	5	6	8	10	12	15	17
EN 14511							
Supplied power at 0/35 °C (kW)	1.08	1.32	1.64	2.01	2.51	3.48	3.93
Delivered power at 0/35 °C (kW)	4.65	6.07	7.67	9.66	11.48	15.37	16.89
COP 0/35 °C	4.30	4.59	4.68	4.81	4.57	4.42	4.30
EN 14825							
P _{designh} 35°C/55 °C	6/5	7/6	9/8	12/10	14/14	18/18	20/20
SCOP Cold/Average climate, 35 °C	4.6/4.5	5.0/4.8	5.1/4.9	5.2/5.1	4.9/4.8	4.7/4.6	4.5/4.4
Efficiency class product label 35°C/55°C	A++/ A++	A++/ A++	A++/ A++	A++/ A++	A++/ A++	A++/ A++	A++/ A++
Efficiency class package label 35°C/55 °C*	A+++/ A++	A+++/ A++	A+++/ A++	A+++/ A+++	A+++/ A++	A+++/ A++	A++/ A++
Efficiency class hot water/ Load profile with VPB 300/ VPBS300	A/XXL					N/A	
Operational voltage (V)	400V 3N~50Hz						
Min fusing (fuse type C) excl immersion heater (A)	16	16	16	16	16	16	16
Immersion heater, max (kW)	9						
Refrigerant (R407C) (kg)	1.2	1.5	1.8	2.1	2.0	1.8	1.8
Max temperatur heating medium (flow/return pipes) at 0°C brine (°C)	70/58						
Sound power level (LwA)** (dBA)	37	42	43	43	43	42	42
Sound pressure level (LpA)*** (dBA)	21,5	27	28	28	28	27	27
Net weight (kg)	160	170	180	185	190	200	205
Height (mm)	1500						
Width (mm)	600						
Depth (mm)	620						

* The reported efficiency of the package also takes the controller into account.

** According to EN 12102 at 0/35°C


*** According to EN 11203 at 0/35°C and 1 m distance

Docking options

NIBE F1145 can be connected in several different ways e.g. to a ventilation recovery exhaust air module, free cooling, active cooling, a buffer vessel, underfloor heating, hot water heater, oil/gas/wood-fuelled boiler, accumulator tank with water heater, two or more heating systems, ground water system, two pools or solar panels.

Compressor module

The compressor module is easily pulled out for transport, installation and service.

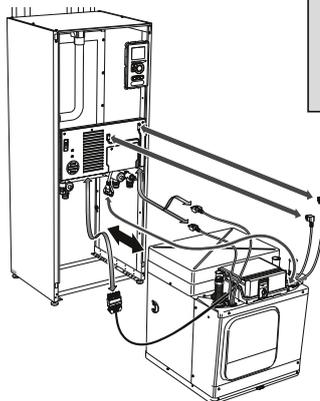


Display with user instruction

NIBE F1145 has an innovative colour display with simple menus and clear symbols that make it easy for you to control consumption and monitor, for instance, run time, or create your own personal settings. The heat pump is equipped with an attractive, stylish aluminium cover. It also has a USB port that makes it easy to update software and download operating data.

System description

NIBE F1145 consists of heat pump, immersion heater, circulation pumps and control system. NIBE F1145 is connected to the brine and heating medium circuits. In the heat pump evaporator, the brine (water mixed with anti-freeze) gives off its energy to the refrigerant, which is vapourised in order to be compressed in the compressor.

The refrigerant, of which the temperature has now been raised, is passed to the condenser where it gives off its energy to the heating medium circuit and, if necessary, to any docked water heater. If there is a further need for heating/hot water than the compressor can provide there is an integrated immersion heater.

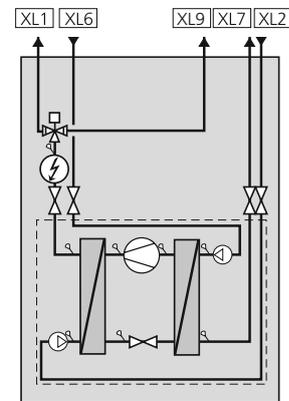

- XL 1 Connection, heating medium flow
- XL 2 Connection, heating medium return
- XL 9 Connection, hot water
- XL 6 Connection, brine in
- XL 7 Connection, brine out

